


Data logger HIM



Intelligent Energy Management

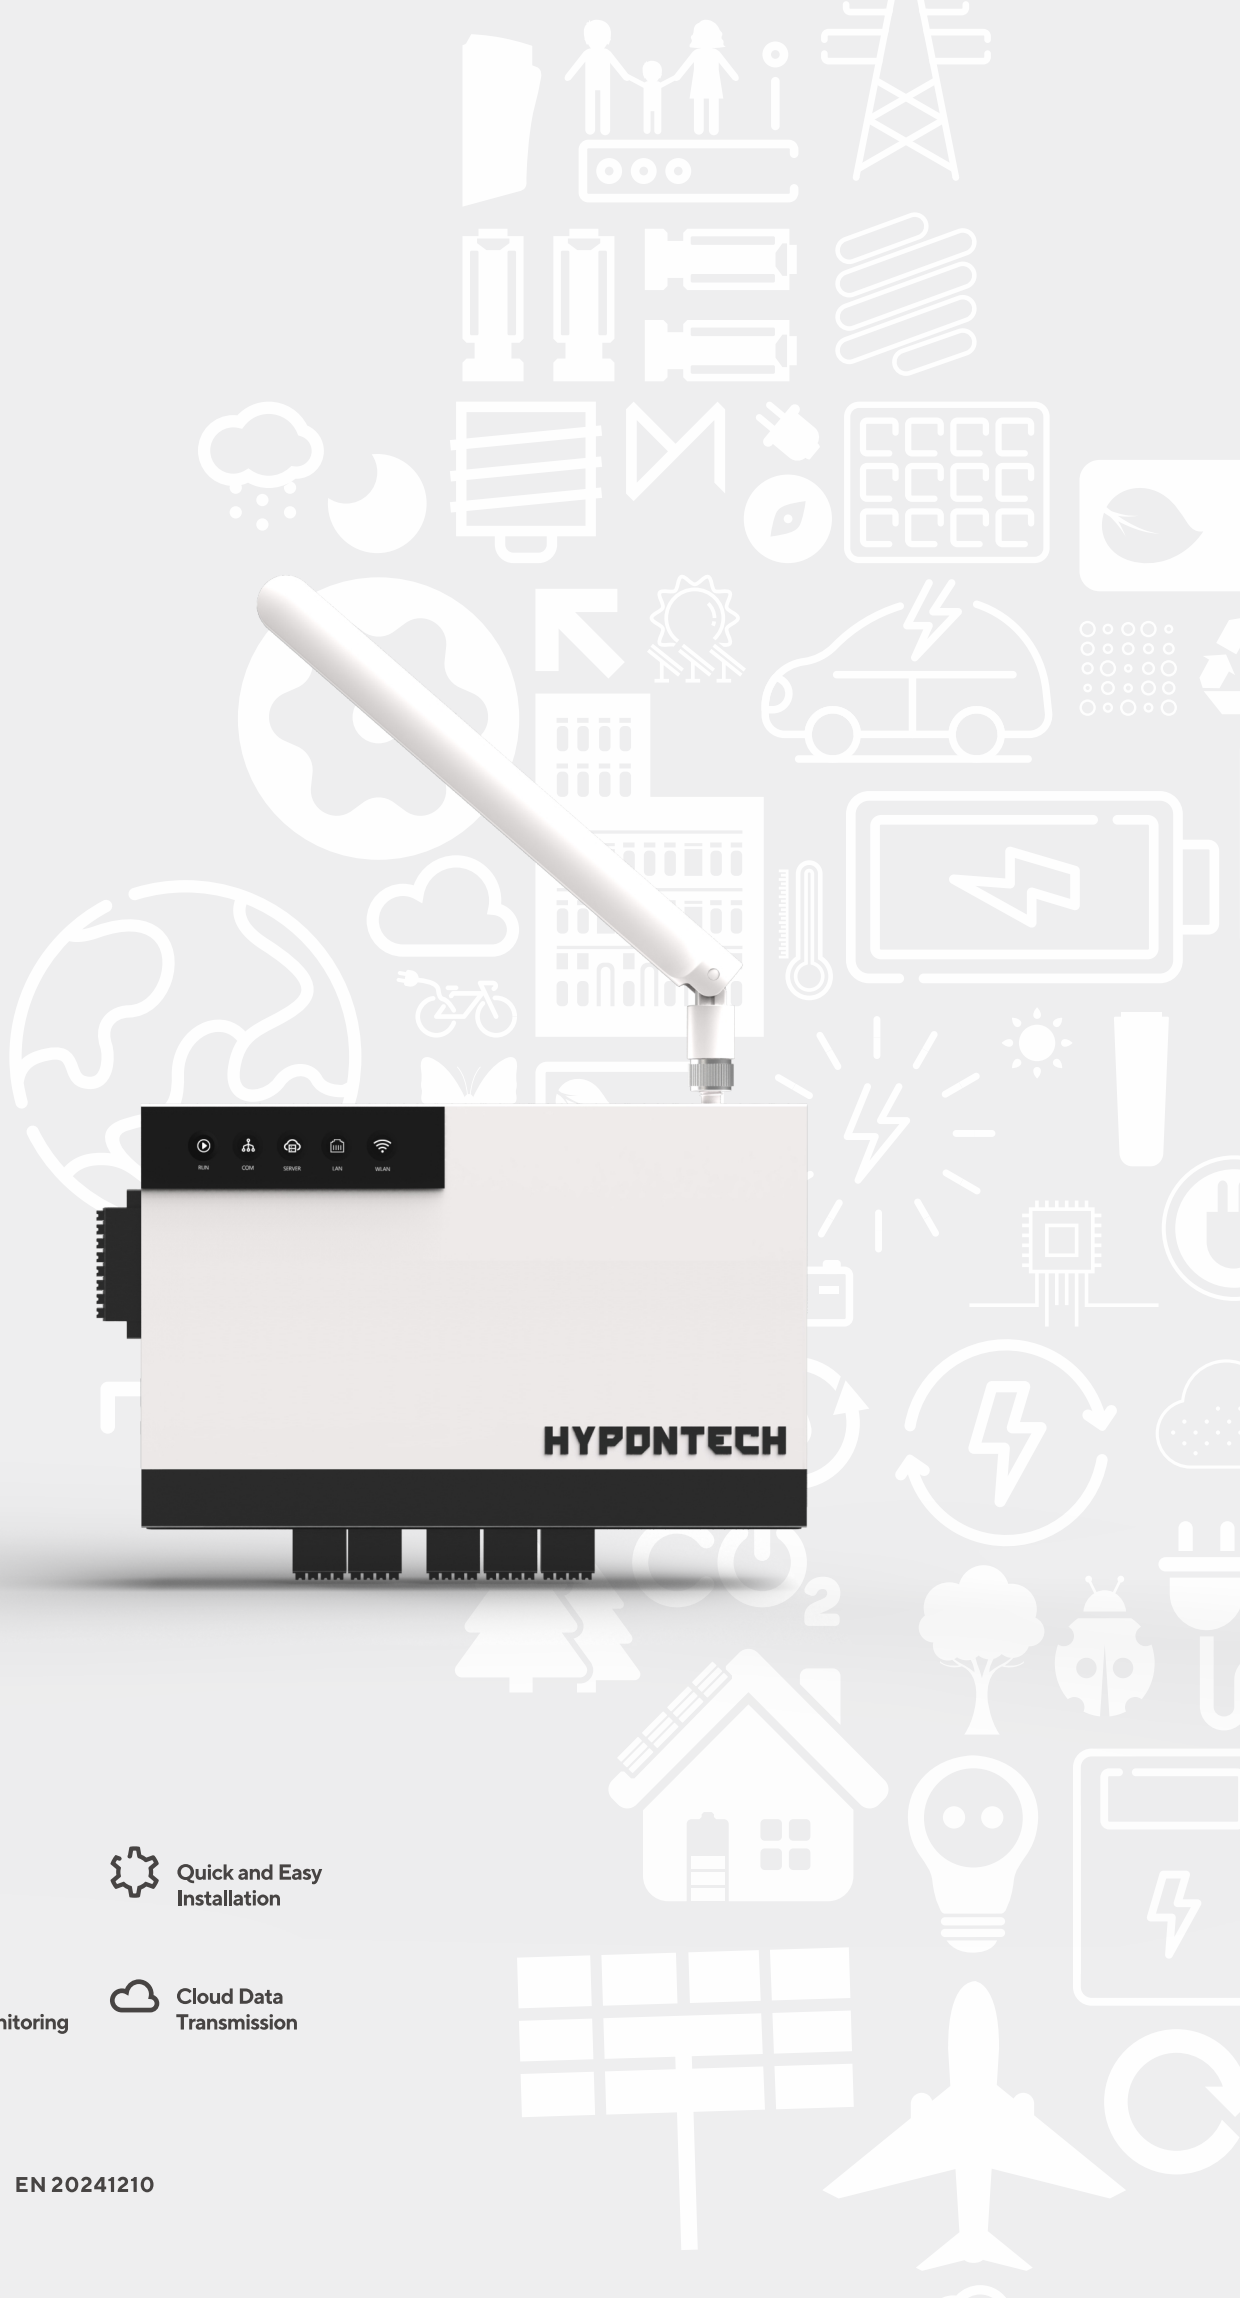

Quick and Easy Installation



24/7 Real-Time Consumption Monitoring



Cloud Data Transmission

HYPONTECH

HYPON.COM
 @HYPONTECH SOLAR ENERGIZING FUTURE

EN 20241210

MODEL	HM-2000D(4G)	HM-2000D(Wi-Fi)
POWER ADAPTER		
Input Voltage Range / V	95-265	95-265
Frequency / Hz	50/60	50/60
Output Voltage / V	12	12
Output Current / A	0.8	0.8
HARDWARE		
Data Transfer Interval	5 mins (5mins is default value, adjustable)	5 mins (5mins is default value, adjustable)
Manage Inverter Quantity	48	48
Inverter Communication	RS485x3	RS485x3
Wireless Module	4G/Wi-Fi	Wi-Fi
Enthernet Interface	LAN (100Mbps)	LAN (100Mbps)
Meter Interface	RS485 x 1	RS485 x 1
Environmental Detector	RS485 x 1	RS485 x 1
Digital Input Interface	6	6
Dry Contact Output	4	4
4G Card Interface	1	0
LED	6	5
Reset	1	1
GENERAL DATA		
Dimensions (W*H*D) / mm	240*228*57	240*228*57
Weight / kg	0.74	0.74
Protection Class	IP20	IP20
Installation Method	Wall Mounted/Din-Rail	Wall Mounted/Din-Rail
Operating Temp / °C	-20 ~ +60	-20 ~ +60
Storage Temp / °C	-30 ~ +80	-30 ~ +80