




Data logger HM

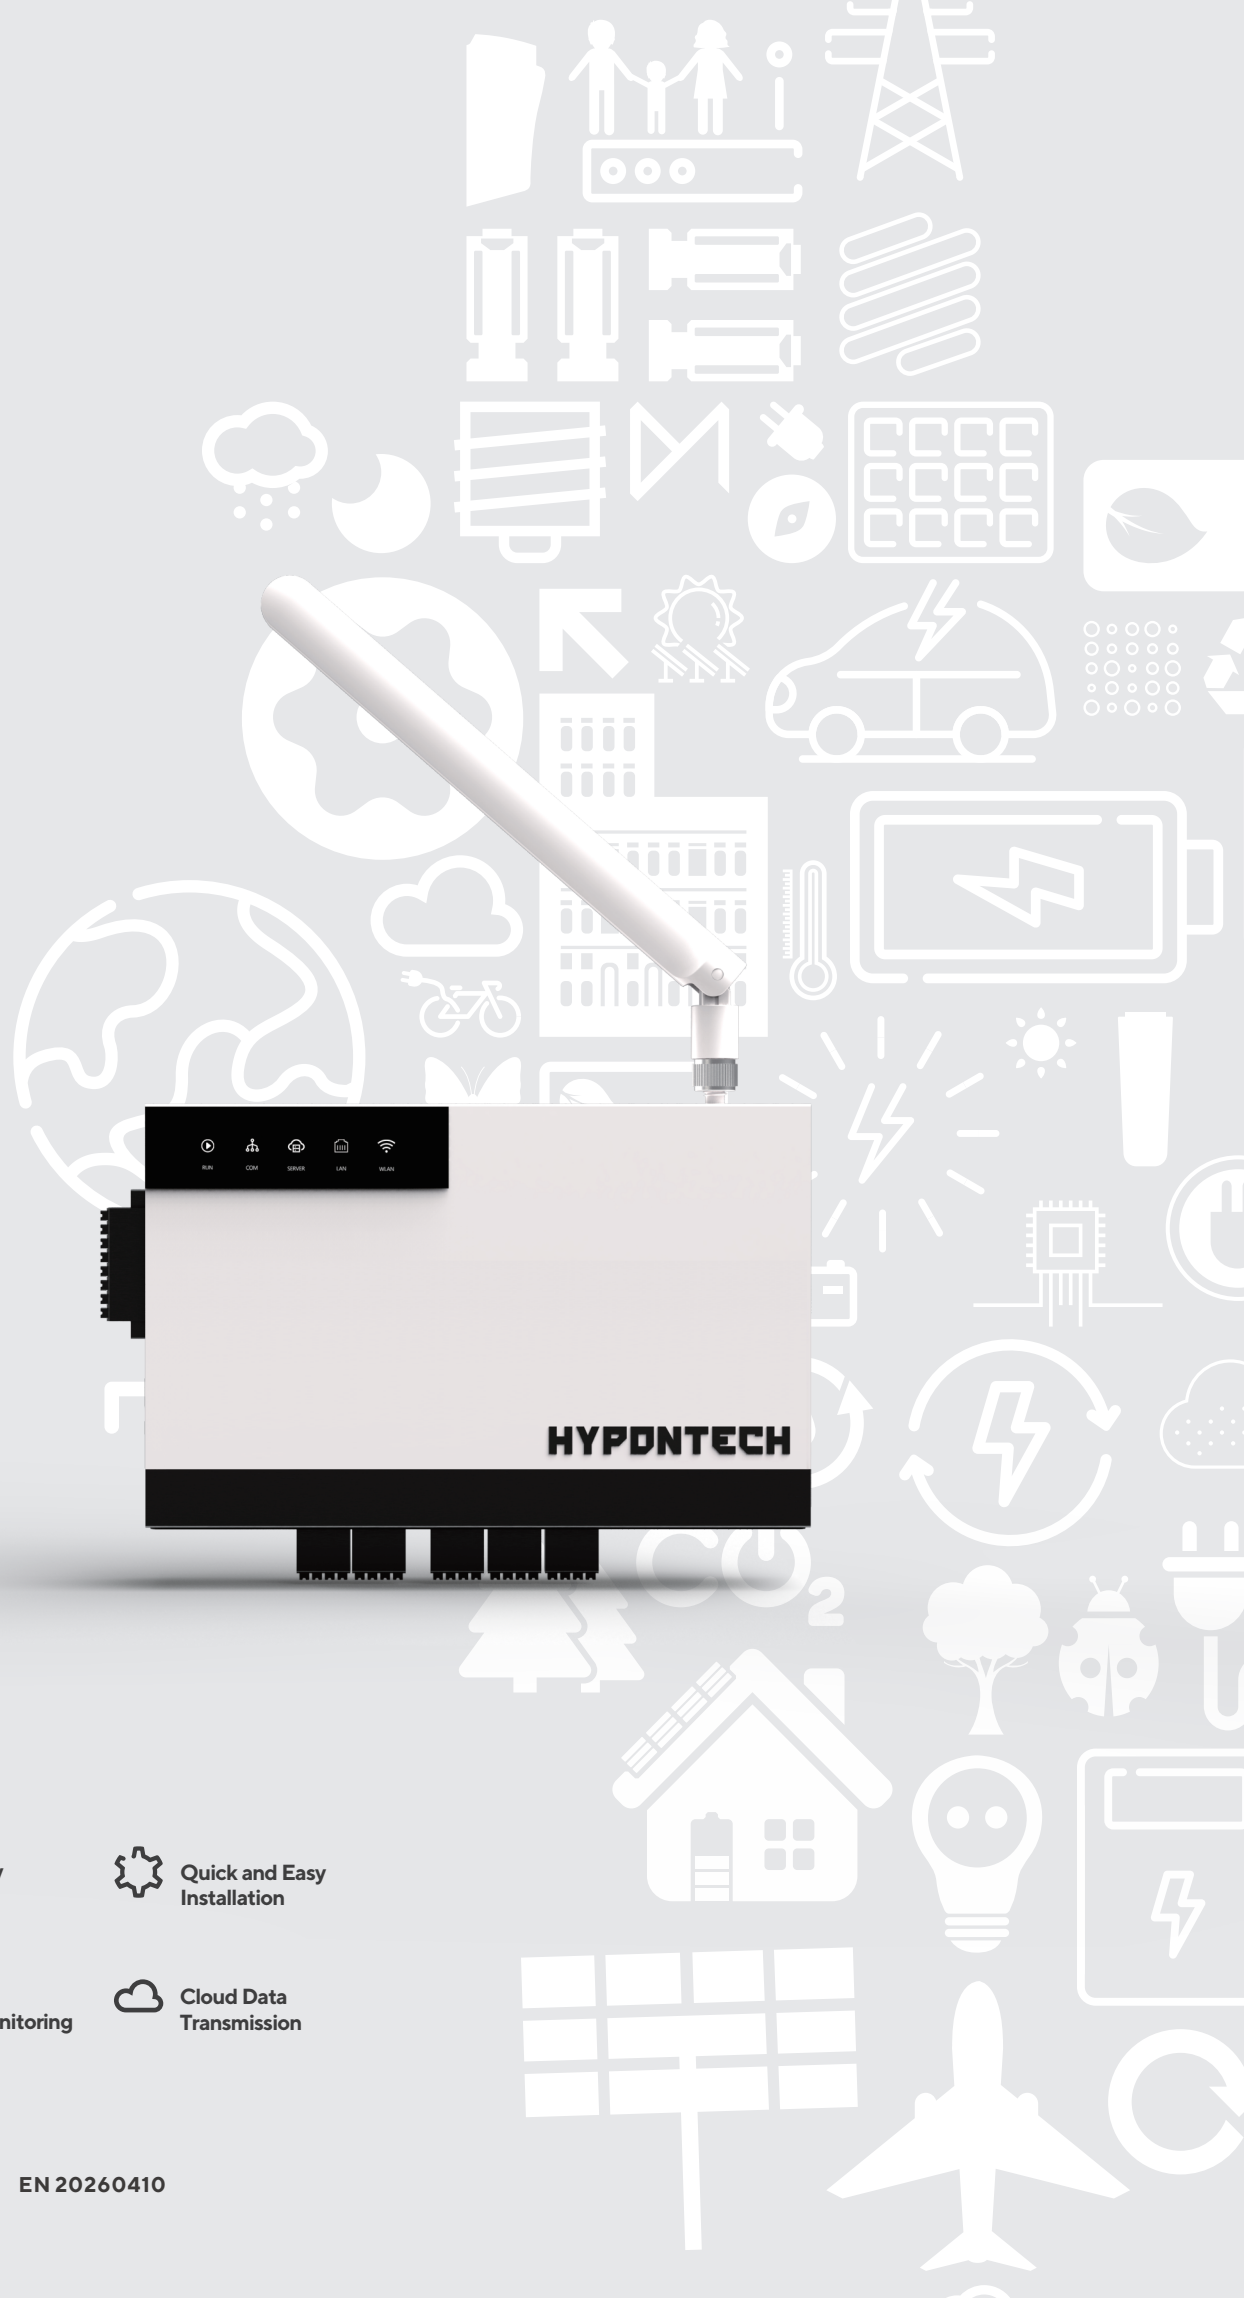

 Intelligent Energy Management

 Quick and Easy Installation

 24/7 Real-Time Consumption Monitoring

 Cloud Data Transmission

HYPONTECH

 [HYPON.COM](https://www.hypontech.com)
© HYPONTECH SOLAR ENERGIZING FUTURE

EN 20260410

POWER ADAPTER

Input Voltage Range / V	95-265
Frequency / Hz	50/60
Output Voltage / V	12
Output Current / A	0.8

HARDWARE

Data Transfer Interval	5 mins (5mins is default value, adjustable)
Manage Inverter Quantity	48
Inverter Communication	RS485x3
Wireless Module	Wi-Fi
Enthernet Interface	LAN (100Mbps)
Meter Interface	RS485 x 1
Charging Pile	RS485 x 1
Digital Input Interface	6
Dry Contact Output	4
LED	5
Reset	1

GENERAL DATA

Dimensions (W*H*D) / mm	180*115*40.5
Weight / kg	0.6
Protection Class	IP20
Installation Method	Wall Mounted/Din-Rail
Operating Temp / °C	-20 ~ +60
Storage Temp / °C	-30 ~ +80